


25-PAIR MINI-ROCKER TAILED TERMINAL BLOCK

The new 25-Pair Mini-Rocker Tailed Terminal Blocks come in a Category 5 rated IDC wire termination system that makes copper connectivity and wire management throughout your copper network simple, reliable and affordable.

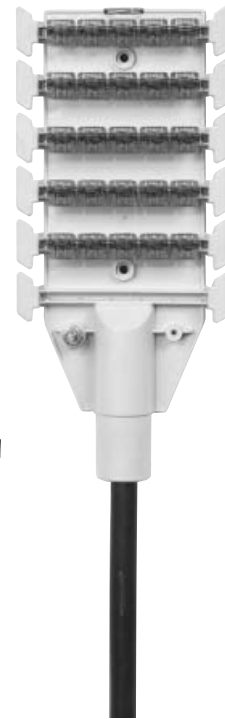

Every aspect of the data ready Mini-Rocker's design has been optimized for ease of use. Wires are easy to insert, and secure connections are simple to establish and verify. Pair-at-a-time jumper connections speed up jumping, and easy line disconnections make service provisioning a snap. The Mini-Rocker requires no tools, making wire terminations fast and easy.


The "quiet front" design of the Mini-Rocker eliminates incidental shorts and interference. Mini-Rocker's gas tight connections provide a low and stable connection resistance. HVC (High Viscosity Compound) encapsulation blocks moisture and eliminates corrosion, ensuring trouble-free service in both internal and external installations.

FEATURES/BENEFITS

- 5 to 30 pair block configurations, filled/shielded, aircore or IW stub types and lengths of 4' or 15'
- "Pair-at-a-time" connections. Copper pairs remain twisted together, speeding jumper wiring and assisting in wire management
- Insulation displacement technology eliminates the need to strip wires resulting in faster on-site connections
- No tools required for termination. Finger-operated receivers and audible latch-down action eliminate problems of breakage through improper use of tools
- High Viscosity Compound (HVC) environmental encapsulation eliminates corrosion enabling connector to function in high humidity environments
- "Quiet front" design and easy test access eliminate shorts and need for disconnection during circuit testing
- IDC connectors accommodate most wire designs with conductor sizes from 26 AWG to 22 AWG
- Designed to comply with Telcordia Specification TR-NWT-000975

DIMENSIONS

Length: 10.00" (254.0mm)
Width: 4.50" (114.3mm)
Depth: 1.50" (38.1mm)

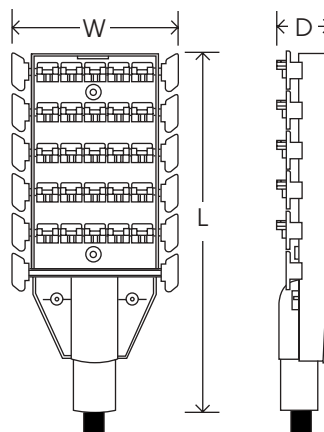


25-PAIR MINI-ROCKER TAILED TERMINAL BLOCK

ORDERING INFORMATION

4

EASY STEPS:

- ① Select Pair Count
- ② Select Material
- ③ Indicate Type
- ④ Select Stub Length

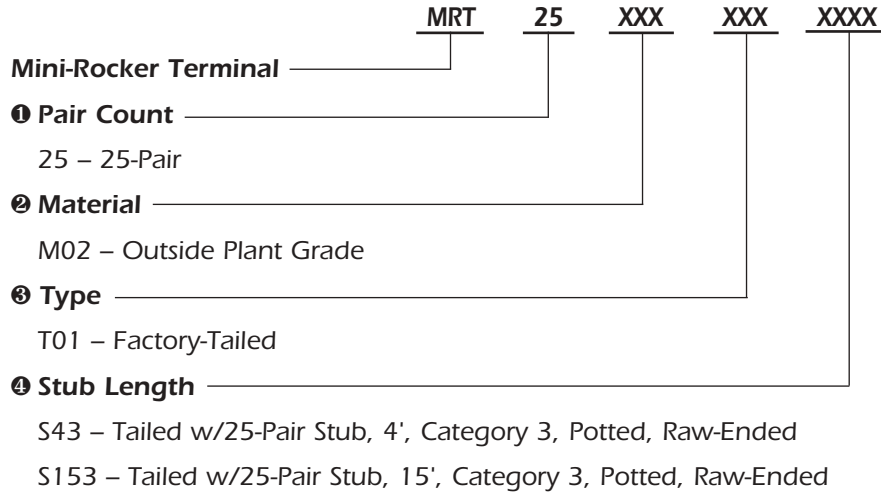


Example: MRT25M02T01S43


25-Pair Mini-Rocker Block, Fire Retardant, Wire-Wrap, Tailed with 25-Pair Stub, 4', Category 3, Potted, Raw-Ended

APPLICATIONS


Mini-Rocker Tailed Terminal Blocks are ideally suited for both indoor and outdoor applications. HVC encapsulation eliminates corrosion, enabling the Mini-Rocker Blocks to function in high-humidity environments. The Mini-Rocker Block is equally at home in aerial, pedestal, wall mount, marina and subsurface installations.

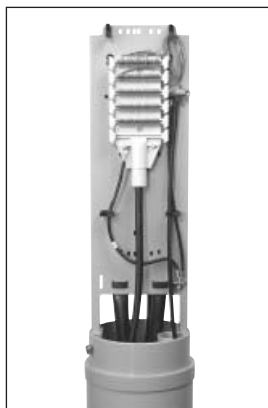

CFP800 Shown With
25-Pair Mini-Rocker
Terminal Block

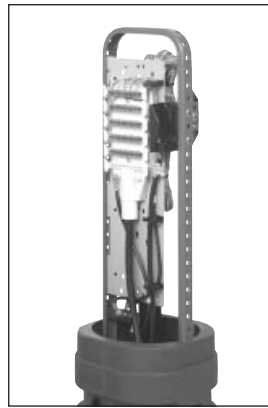

MAH77 Shown With
25-Pair Mini-Rocker
Terminal Block

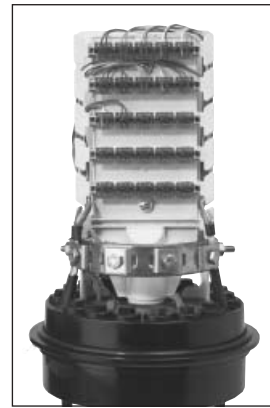

BMT609 Shown With
25-Pair Mini-Rocker
Terminal Block